



AH2424, AH3030, and AH3036 Rabbit Hutch

Features:

- Easy to clean, rust resistant galvanized steel construction
- Bottom panel with 1/2 x 1" spacing
- Side and top panels with 1 x 2" spacing
- Spring tension door latch
- Vinyl door guard
- Available in three sizes
- Stackable using Pet Lodge™ Frame Kits
- Complete line of accessories available

Each Rabbit Hutch Contains:

1 Bottom Panel	2 Side Panels	1 Spring
1 Back Panel	1 Top Panel	1 Door Latch
1 Front Panel	4 Vinyl Door Guards	1 Package Wire Clips
1 Door Panel		

Tools Required:


1 ACP2 Wire Clip Pliers. See instructions below.

NOTE: Ordinary pliers do not work -- they will mash rather than curl the clip around the wire.

Using the ACP2 Wire Clip Pliers:


1. Place ACC1 Wire Cage Clip in the pliers.
2. Position clip next to wires to be fastened.
3. Close the pliers to form clips around wires.

CAUTION: Avoid pinching skin in pliers.

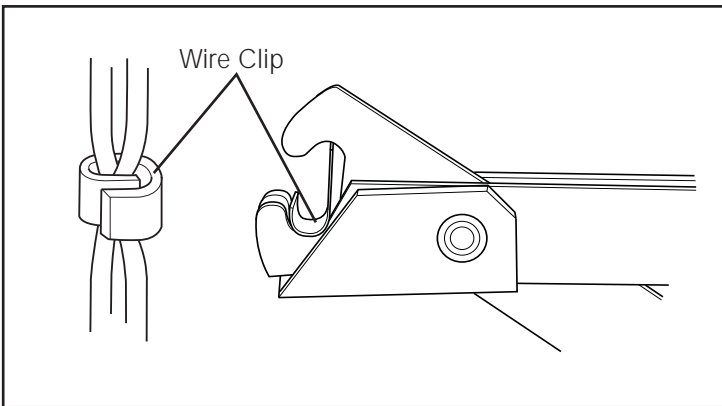

Assembly Instructions:

1. Lay out the hutch panels as shown in Figures 2 - 4. Use the illustration that matches your model hutch. You can put the door on the right or left side of the front of the hutch.
2. Fasten a clip at each ●. Do not put clips where ○ appears.
NOTE: You do not need to be exact in placing the clips.
3. Raise two panels so that they meet at the corner. Fasten clips at each ● shown in Figure 5. Repeat for the other corners.
4. Attach the door on the **inside** of the hutch using clips at each ● shown in Figure 6.
5. Attach the spring and door latch as shown in Figure 6.
6. Slide the vinyl door guards over the edge of the door opening.
7. Place the top panel on top of the side panels. Fasten clips at each ● shown in Figures 7 - 9. Do not put clips where the ○ appears.

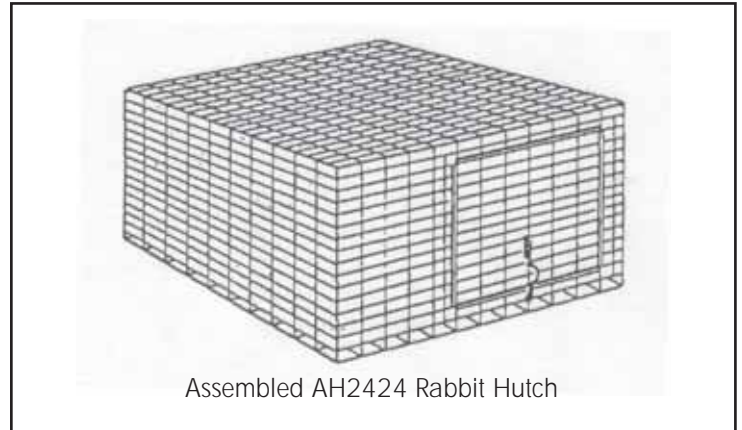

Assembled AH2424 Rabbit Hutch

Figure 1

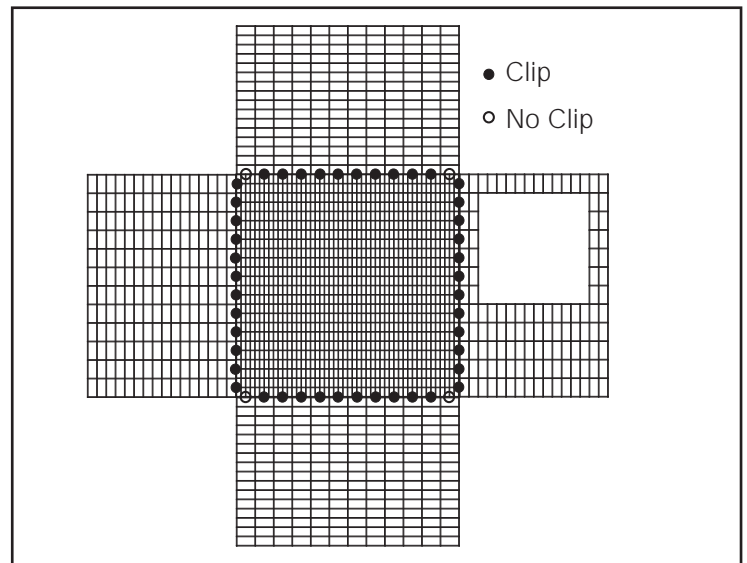


Figure 2 (Model AH2424)

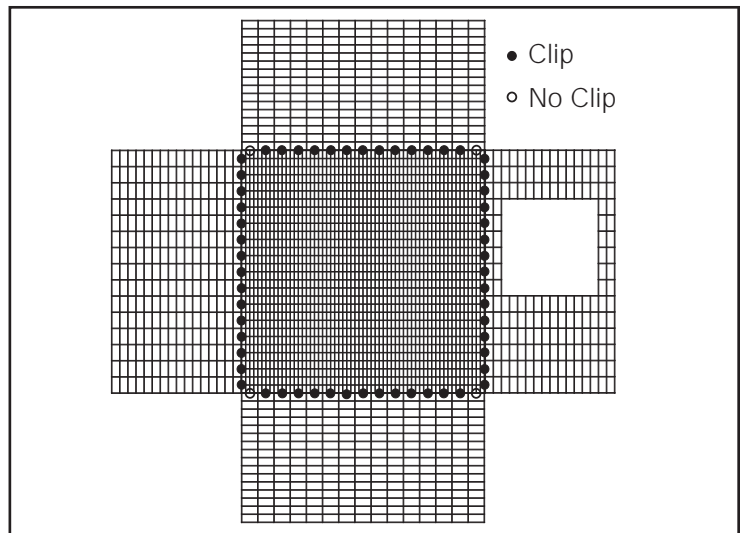


Figure 3 (Model AH3030)

